

# ELKAY<sup>®</sup>

## SPECIFICATIONS

### EZH2O<sup>®</sup> Bottle Filling Station Surface Mount Model EZWSSM

**REUSE ONLY**

#### PRODUCT SPECIFICATION

Surface Mount bottle filling station designed for installations with limited wall depth. Bottle filling unit shall include an electronic sensor for touchless activation with auto 20-second shut-off timer. Shall include Green Ticker™ displaying count of plastic bottles saved from waste. Bottle filler shall provide 1.1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include integrated silver ion anti-microbial protection in key areas. Unit shall meet ADA guidelines. Unit shall be lead-free design which is certified to NSF/ANSI 61 and 372 and meets Federal and State low-lead requirements. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.



Model  
EZWSSM

#### STANDARD FEATURES

- Sanitary, touchless activation with auto 20-second shut-off
- Integrated Silver Ion Anti-microbial Protection in key areas
- Quick Fill Rate: 1.5 gpm; 1.1 gpm when connected to remote chiller
- Laminar Flow provides minimal splash
- Real Drain System eliminates standing water
- No bubbler required
- Visual User Interface display includes:
  - Innovative Green Ticker™ counts bottles saved from waste.
- Optional remote chiller can be installed within 15 feet of unit to deliver chilled drinking water

#### CONSTRUCTION

- Stainless steel bottle filler wrapper with ABS plastic alcove
- Includes robust hanging bracket for surface mount

**WARRANTY:** Electrical components and water system are warranted for 12 months from date of installation or 18 months from factory shipment, whichever date falls first.

#### CAPACITIES CHART

Model	Voltage / Hertz	Chilling Capacity	F.L. Amps	Rated Watts	Approx Ship Wt.
EZWSSM	115V / 60Hz	N/A unless connect to chiller	1.0	15	18
EZWSSMJO	220V / 50-60HZ	N/A unless connect to chiller	0.5	15	18

The above ratings apply only to the EZWSSM unit. Ratings for the chiller not included

#### CERTIFICATIONS / STANDARDS

- ADA Compliant
- UL399 and CAN/CSA 22.2 No. 120 Certified (Only 115V model are certified)
- ANSI/NSF 61 and 372 Certified)
- GreenSpec<sup>®</sup> Listed



This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producer's offerings, be certain these features are not overlooked.

**EZH2O<sup>®</sup> Bottle Filling Station**  
**Surface Mount**  
**Model EZWSSM**

**ELKAY<sup>®</sup>**  
**ROUGH-IN**

*\*Rated for indoor use only*


**IMPORTANT!**

**INSTALLATION NOTES:**

- Ensure wall is structurally sound to bear the loads imparted by the surface mount bottle filler.

**ELECTRICAL**

EZH2O equipped with electrical cord and three-prong molded rubber plug for use with 15-amp minimum receptacle. Rated at 115V/60Hz, single phase.

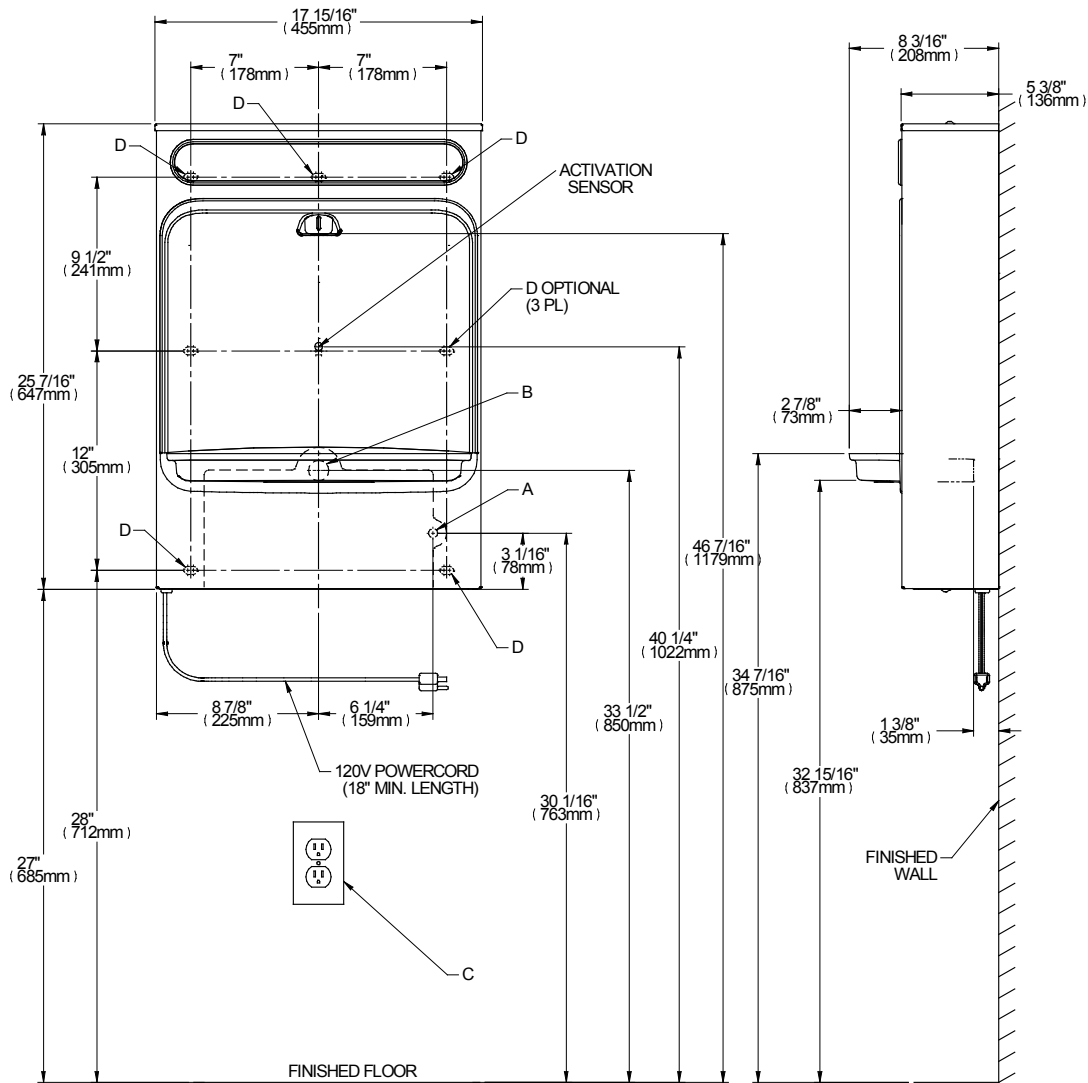

**LEGEND:**

- A = RECOMMENDED WATER SUPPLY LOCATION ; 1/2" IPS MAXIMUM PIPE SIZE. SERVICE STOP VALVE NOT FURNISHED.
- B = RECOMMENDED LOCATION FOR WASTE OUTLET 1-1/4" O.D. MAXIMUM PIPE SIZE.
- C = ELECTRICAL OUTLET, THREE (3) CONDUCTOR GROUNDED. LOCATE WITHIN SAFE REACH OF POWER CORD.
- D = 7/16" X 3/4" OBROUND MOUNTING HOLES FOR FASTENING BACKPLATE TO WALL.

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_ Qty: \_\_\_\_\_

Contact Info (Name, Phone, Email): \_\_\_\_\_

\_\_\_\_\_

Approval: \_\_\_\_\_